




### Features

- Plastic clamp designed for pipe fixing.
- Fast installation. This clamp can be tightly closed by pressing the pipe without tools.
- Developed for direct impact fixing with a nailer. Compatible with FORCE ONE+, FOX and other nailers.
- Can be fixed with 4.5 mm diameter screws in a 6 mm plug.
- Alignment mark. Two marks on the base make it easy to align the shots.
- Smart design with side tabs to join multiple clamps that saves fixings points.

### Certificates and approvals



### Main dimensions

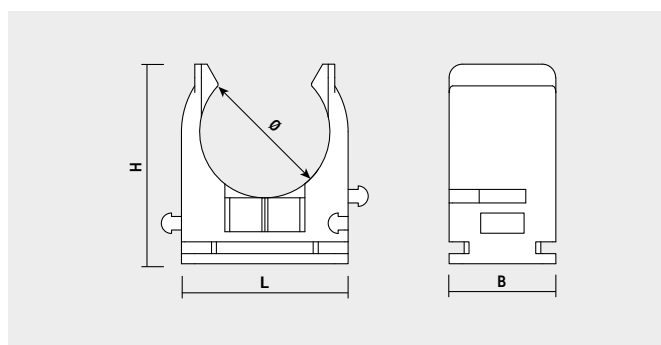


Reference	Ø [mm]	L [mm]	H [mm]	B [mm]
916UT	15.5	23	25.5	16
920UT	19.5	25	29.5	16
925UT	24.5	30.5	34	16
932UT	31	38	42	16
940UT	39	46	50	16

### Base material

- Steel
- Concrete
- Concrete block
- Solid brick

### Installation procedure

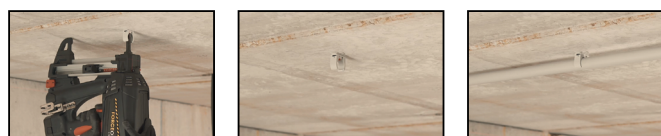

### Product specifications

- Material: HDPE 5502
- Available in grey (RAL 7035)
- Temperature:
  - Installation: 0 °C / +45 °C
  - Continuous use: -20 °C / +100 °C
  - Spikes -30 °C / +120 °C
- Resistance: 6 - 10 kg according to size<sup>(\*)</sup>

<sup>(\*)</sup> Clamp breaking strength is lower than the nail resistance value

### Installation parameters

Material		Concrete	Concrete block	Steel
Minimum distance between anchors	s <sub>min</sub> (mm)	40	40	40
Minimum edge distance	c <sub>min</sub> (mm)	75	100	25
Minimum thickness	h <sub>min</sub> (mm)	100	35	3.5

### Range of pipes

Reference	Diameter	
	Metric [mm]	Plastic [mm]
916UT	16	16
920UT	20	20
925UT	25	25
932UT	32	32
940UT	40	40